


# TOPTURN X5000

## Compost Windrow Turner



The Komptech Topturn X5000 delivers consistent turning performance and optimal windrow pile sizing for most sized commercial composting operations. The X5000, available in a wheel or track chassis, features a large 3'11" diameter, hydraulically-driven turning drum delivering a maximum windrow width of 16'5". The hydraulically extended maintenance platforms enable quick maintenance access.

- ▶ Produces ideal triangular windrow shape for faster composting times
- ▶ Easy and accessible maintenance with hydraulically extendable service platforms
- ▶ Infuse water directly into the center of the windrow pile while turning (available option)

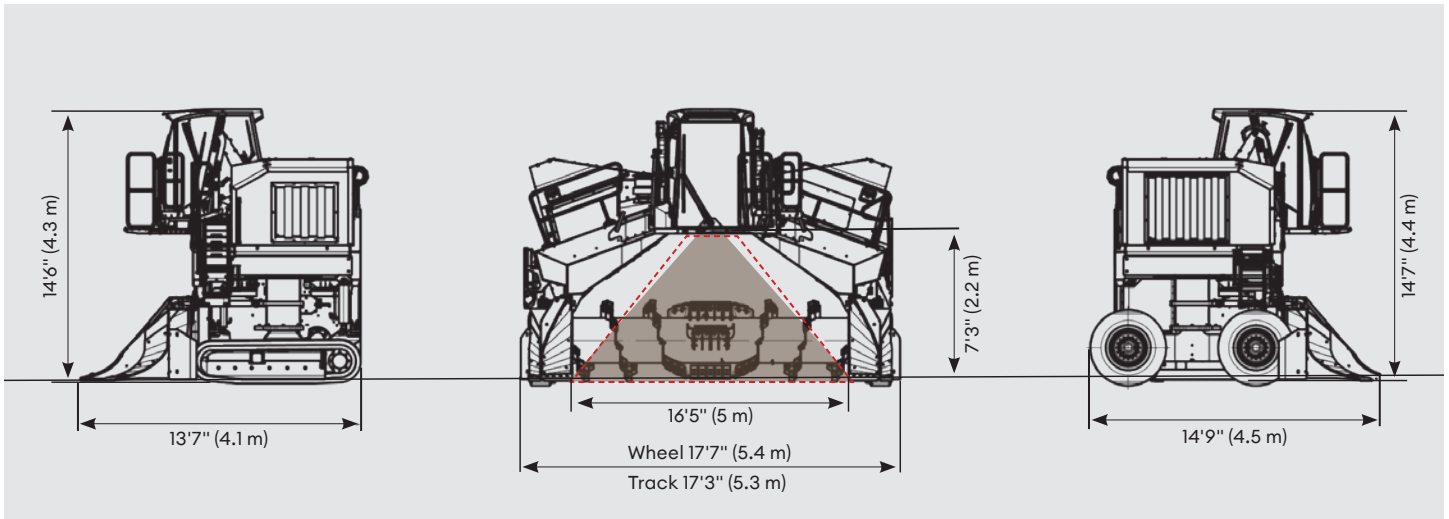

## TOPTURN X5000 Technical Specifications

### Power

Diesel Engine / Horsepower: CAT® C9 Tier 4 Final/ 330 HP

### Proportion (dependent on equipment)

Transport Dimensions:  
 Wheel - 17'9" x 9'10" x 10'10" (5.4 x 3.0 x 3.2 m)  
 Track - 17'9" x 8'4" x 10'9" (5.4 x 2.5 x 3.3 m)

Working Dimensions:  
 Wheel - 17'7" x 14'9" x 14'7" (5.4 x 4.5 x 4.4 m)  
 Track - 17'3" x 13'7" x 14'6" (5.3 x 4.1 x 4.3 m)

Weight: -35,000 lbs (Wheel) / -36,000 lbs (Track)

### Performance (dependent on material)

Maximum Windrow Width: 16'5" (5 m)

Maximum Windrow Height: 7'3" (2.2 m)

Maximum Throughput: up to 5,200 yd<sup>3</sup>/hr (4,000 m<sup>3</sup>/hr)